


## Seaming Tape for House Wrap, Waterproofing and Repair

### 1. Product Description

Nichigo G-Tape 3020SB is a single sided tape made with a laminated polyethylene cloth and proprietary acrylic adhesive. 3020SB offers superior physical properties and easy handling when compared against conventional tapes.

### 2. Composition

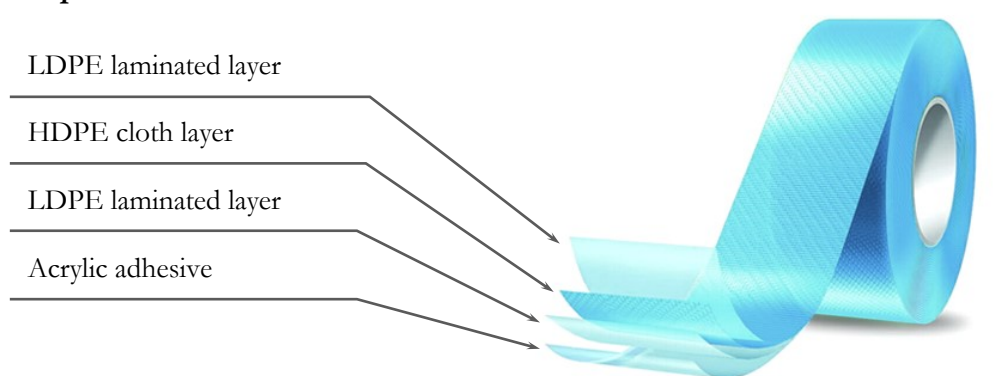

### 3. Key Features

- Easy to tear by hands straight: No cutting tool is required
- Scrap-less: face to face contact of adhesive separates without damaging the adhesive
- Repositionable - no wrinkles
- Good adhesion on rough surfaces

### 4. Typical Properties

| Content               | Unit          | Value      | Test method |
|-----------------------|---------------|------------|-------------|
| Thickness             | mil (mm)      | 5.9 (0.15) | PSTC 133    |
| Peel Adhesion         | oz/in (N/cm)  | 90 (10)    | PSTC 101    |
| Shear Adhesion        | mil (mm)      | 3.9 (0.1)  | PSTC 107    |
| Breaking Strength     | lbf/in (N/cm) | 34 (60)    | PSTC 131    |
| Elongation            | %             | 15         | PSTC 131    |
| Temperature use range | °F            | -40 to 200 | MCC method  |

**Note:** Typical values, not for specification or guarantee purpose

## **5. Characteristics**

- ✓ Waterproof
- ✓ High weather resistance
- ✓ No black speck or strain
- ✓ High dimension stability
- ✓ High chemical and solvent resistance
- ✓ High abrasion resistance

## **6. Application Ideas**

- Seaming, splicing of insulation sheets and house wraps
- Seaming, splicing around window frame
- Window flashing
- Repair
- Quick waterproofing

## **7. Further Technical Information**

- Before using, please test a small piece to confirm any problems on the surface.
- Some additives in PVC may soften adhesive layer over time. This may cause adhesive residue.
- G-Tape may leave residue on some natural stones or change in quality of surfaces.
- An effective residue remover is a 91% IPA(isopropyl alcohol) available pharmacies.
- G-Tape may peel off surfaces of delicate materials or old coatings.
- Use only on clean, dry surfaces.
- For best performance, use within 1 year after purchase.
- Store in a dark, cool place.

## **8. Cautions**

- DO NOT use as an electrical insulation tape.
- Avoid prolonged contact with skin. May cause irritation.
- Variety of factors may impart the performance of Nichigo G-Tape. Before use, please test internal method or application.

## **9. Limitation of Remedy and Liability**

Replace of the product or refund of the purchase price, at the purchase price, at our opinion, shall be your exclusive remedy. We will not be liable for any loss or damage arising from this product, whether direct, indirect, special, incidental, or consequential.

---

# MITSUBISHI CHEMICAL CORPORATION

Environment and Living Solutions Business Domain  
Infrastructure Solutions and Agricultural Materials Division  
Infrastructure Solutions Department  
G-Tape Business Group

**Address:** Mitsubishi Chemical Nihonbashi Building,  
2-2, Nihonbashihongoku-cho 1-chome, Chuo-ku, Tokyo 103-0021, Japan  
**Phone:** +81-(0)3-3279-4110, E-mail: [MCJP-DG-NGC\\_gtape@mchcgr.com](mailto:MCJP-DG-NGC_gtape@mchcgr.com)  
**Website:** <https://www.m-chemical.co.jp>

North & South America  
MITSUBISHI CHEMICAL AMERICA, Inc.  
3930 Ventura Drive Suite 355, Arlington Heights, IL 60004, USA  
**Phone:** +1-224-347-2326, E-mail: [MCA-info@m-chem.com](mailto:MCA-info@m-chem.com)  
**Website:** <http://www.gtape.com>

Europe, Africa & Middle East Asia  
NIPPON GOHSEI Europe GmbH  
Merowingerplatz, 1a, D-40225, Düsseldorf, Germany  
**Phone:** +49-211-385488-221, E-mail: [eurossales@nippon-gohsei.com](mailto:eurossales@nippon-gohsei.com)  
**Website:** <http://www.nippon-gohsei.com>